


Dimensions in inches

- Power 100W AVG.
- Frequency Range: 400 to 2700 MHz
- PIM : -163 dBc typ (2 x 43dBm @ 1900MHz)
- Protection IP65

Specifications

Model	TLP100 B4 DF
Frequency Range	400 - 2700 MHz
Power	100W avg.
passive Intermodulation	-163 dBc (2x43 dBm @ 1900 MHz)
VSWR	1.1.2
Return Loss	20.8 dB (min)
Protection	IP65
DC return	Open Circuit (cable end insulated)
Environment	-35 TP +55C Ambient

Dimensions

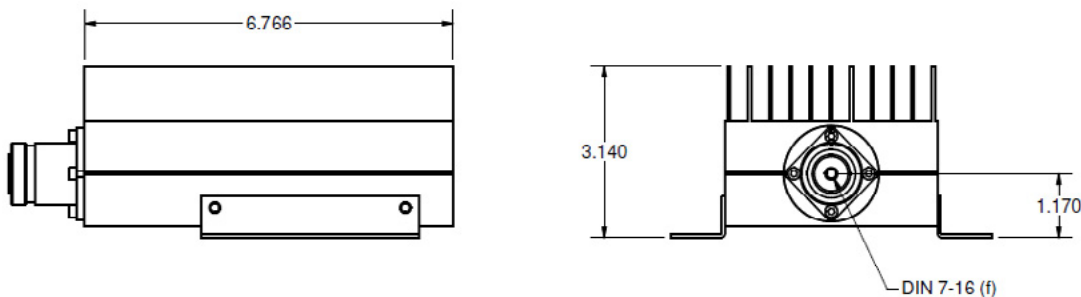

Dimensions in inches

RF & Microwave Technology

AWT-Global provides advanced telecommunication technology products and analyzers for a variety of RF and Microwave applications.

AWT Global
 117 Grand Avenue
 Hackettstown
 New Jersey 07840, USA
 p: +1 (973) 321-3423
 e: sales@awt-global.com
 w: www.awt-global.com